

**Hy-Lok USA, Inc.**


14211 Westfair West Dr.

Houston, TX 77041, USA

**Phone:** 832.634.2000 • **Fax:** 832-634-2099

**Email:** info@hylokusa.com

## Q Series Hy-Lok Bulkhead Tube Stem Connector Fittings

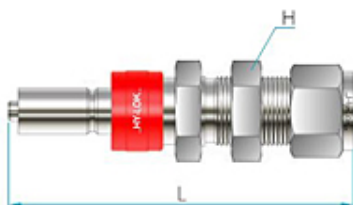

Results 1 - 12 of 12

Part Number	Tube Outside Diameter	Length (L)	Width Across Flat (H)	Working Pressure	Temperature Rating with FKM O-Ring
Q1SSBH-4T	1/4 in	2.74 in 69.6 mm	5/8 in 15.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2SSBH-6T	3/8 in	2.92 in 74.2 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3SSBH-8T	1/2 in	3.43 in 87.1 mm	15/16 in 23.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q1SSBH-6M	6 mm	2.74 in 69.6 mm	16.0 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2SSBH-10M	10 mm	3.06 in 77.7 mm	22.0 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3SSBH-12M	12 mm	3.43 in 87.1 mm	24.0 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q1DSBH-4T	1/4 in	2.80 in 71.1 mm	5/8 in 15.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2DSBH-6T	3/8 in	3.27 in 78.0 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3DSBH-8T	1/2 in	3.63 in 92.2 mm	15/16 in 23.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q1DSBH-6M	6 mm	2.80 in 71.1 mm	16.0 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2DSBH-10M	10 mm	3.10 in 78.7 mm	22.0 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3DSBH-12M	12 mm	3.63 in 92.2 mm	24.0 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F

Results 1 - 12 of 12